




## FDV SPEC SHEET

Propus 1550lm 830 120° 16W WH

Art. no: 2118-120-3



Lighting Solutions

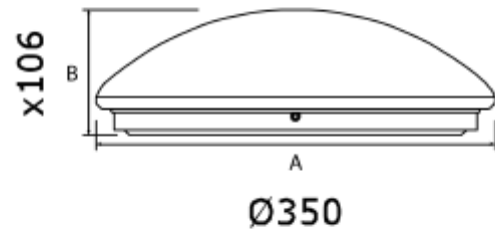

# Propus 1550lm 830 120° 16W WH



Art. no: 2118-120-3

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1532
Lumen LED (tc=25):	1550
Beam Angle:	120
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Opal

### MOUNTING / CONNECTION

Connection:	QuickConnect
Mounting:	Surface, Ceiling

### ELECTRICAL DATA

Dimming:	None
System Power [W]:	16
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	83
Max load pr circuit - B16:	133
Max load pr circuit - C10:	83
Max load pr circuit - C16:	133
Inrush current I <sub>max</sub> [A]:	60
Inrush current time [µs]:	350
Socket / Cap-Base:	N/A
Current Output [mA]:	60
Voltage Forward Min [V]:	25
Voltage Forward Max [V]:	40



## FDV SPEC SHEET

Propus 1550lm 830 120° 16W WH

Art. no: 2118-120-3



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP20
Impact Protection:	IK08
Lifetime [h]:	L80B50: 50 000
Color:	White
Height [mm]:	106
Width [mm]:	350
Weight [kg]:	1,2