




PRODUCT SHEET


Tigrus 360° Square

Art. no: 26927-D2W-36-2

Ledpro
by NORLUX

Tigrus 360° Square


 80-83mm

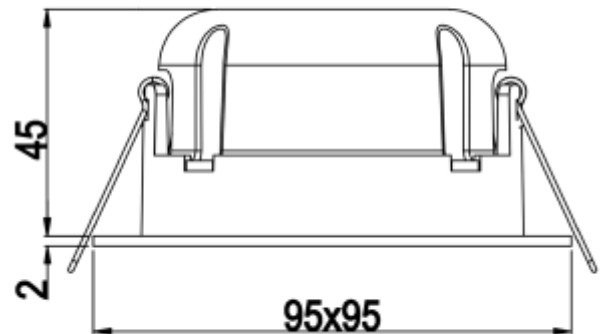

A

SPECIFICATIONS

| | |
|----------------------------|-----------------------------|
| Systemeffekt [W]: | 8W |
| Fargetemperatur [K]: | 3000-1800K D2W |
| Fargegjengivelse [CRI/Ra]: | 95 |
| Lumen ut (lm): | 495lm |
| Lumen LED (tc=25): | 550lm |
| Spredningsvinkel [°]: | 36° |
| Optikk: | Klar |
| Dimmetype: | Fasekutt |
| Flimmerfri: | Ja |
| Spenning [V]: | 230V 50Hz |
| Tilkobling: | Hurtigkobling |
| Montering: | Innfelt, Tak |
| Utsparring [mm]: | Ø80-Ø83mm |
| Lumen/W: | 61lm/W |
| Fargetoleranse [SDCM]: | 3 |
| Farge : | Sort |
| Lengde [mm]: | 95mm |
| Høyde [mm]: | 47mm |
| Bredde [mm]: | 95mm |
| Monteres rett i isolasjon: | Yes, recessed in insulation |

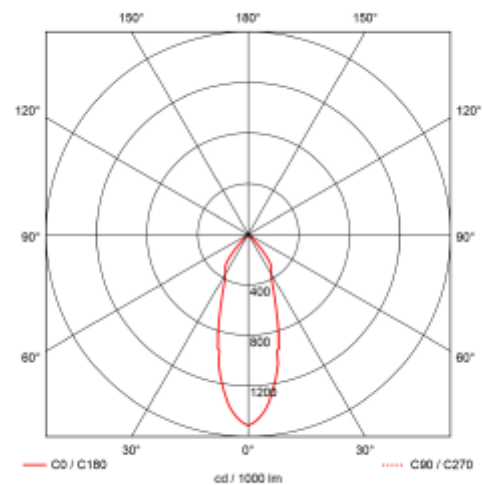

Tigrus 360° Square downlight CRI>95 kan monteres rett i isolasjon. Det 360° roterbare lyshodet gir mulighet til å vippe lysstrålene opp til 25 grader i alle retninger. Tilgjengelig i 2700K og Dim2Warm. IP44. Downlighten er enkel å installere, uten behov for skrutrekkere. Utsparring 80-83mm.