




FDV SPEC SHEET

Propus 1550lm 830 120° 16W WH

Art. no: 2118-120-3

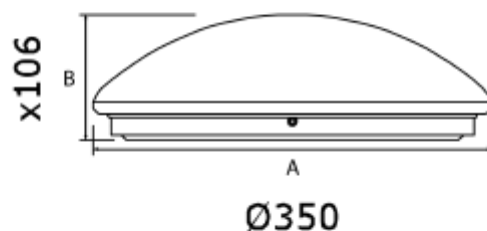

Propus 1550lm 830 120° 16W WH



Art. no: 2118-120-3

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1532
Lumen LED (tc=25):	1550
Beam Angle:	120
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Opal

MOUNTING / CONNECTION

Connection:	QuickConnect
Mounting:	Ceiling, Surface

ELECTRICAL DATA

Dimming:	None
System Power [W]:	16
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	83
Max load pr circuit - B16:	133
Max load pr circuit - C10:	83
Max load pr circuit - C16:	133
Inrush current I _{max} [A]:	60
Inrush current time [μs]:	350
Socket / Cap-Base:	N/A
Current Output [mA]:	60
Voltage Forward Min [V]:	25
Voltage Forward Max [V]:	40



FDV SPEC SHEET

Propus 1550lm 830 120° 16W WH

Art. no: 2118-120-3



PRODUCT

Ingress Protection:	IP20
Impact Protection:	IK08
Lifetime [h]:	L80B50: 50 000
Color:	White
Height [mm]:	106
Width [mm]:	350
Weight [kg]:	1,2